

Flow and check valves ► Ball valves and shut-off valves

Series QR1-ASC

► Qn = 500 - 1600 l/min ► push-in fitting / push-in fitting

LANDVÉLAR



00117381

Version

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Poppet valve

0 bar / 10 bar

+0°C / +60°C

+0°C / +60°C

Compressed air

Materials:

Housing

Seals

Hand lever

Polybutyleneterephthalate


Acrylonitrile Butadiene Rubber

Polybutyleneterephthalate

	Port 1	Port 2	Qn 2►1	Weight	delivery unit	Part No.
			[l/min]	[kg]	[piece]	
	Ø 6	Ø 6	500	0.023	5	R412005482
	Ø 8	Ø 8	550	0.025		R412005483
	Ø 10	Ø 10	1500	0.043		R412005484
	Ø 12	Ø 12	1600	0.047		R412005485

Nominal flow Qn at 6 bar and Δp = 1 bar

Dimensions

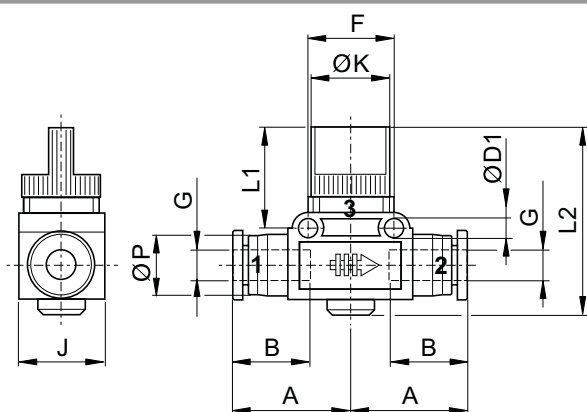

00117438

Part No.	Port G	A	B	Ø D1	F	L1	L2	J	Ø K	Ø P	Delivery quantity Piece
R412005482	Ø 6	26.3	17.2	4.2	18.2	22	40.5	17.6	16.4	12.4	5
R412005483	Ø 8	27.5	18.4	4.2	18.2	22	40.5	17.6	16.4	14.4	5
R412005484	Ø 10	32.4	21	4.2	24	19.1	40.5	21.2	19.2	17.6	5
R412005485	Ø 12	34.9	23.5	4.2	24	19.1	40.5	21.2	19.2	21.2	5

Part No.	Weight kg										
R412005482	0.023										
R412005483	0.025										
R412005484	0.043										
R412005485	0.047										

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information

Pneumatics catalog, online PDF, as of 2016-10-07, ©AVENTICS S.à r.l., subject to change