

PRORIL

50 Hz

LANDVÉLAR



Designed for continuous operations, excellent performance and easy maintenance, PRORIL Tank series pumps have proven their reliability and durability in demanding areas like construction, mining, tunneling, quarries, industries and rental applications.

Dewatering Pump


TANK SLIM 230

High Chrome Dewatering Pump



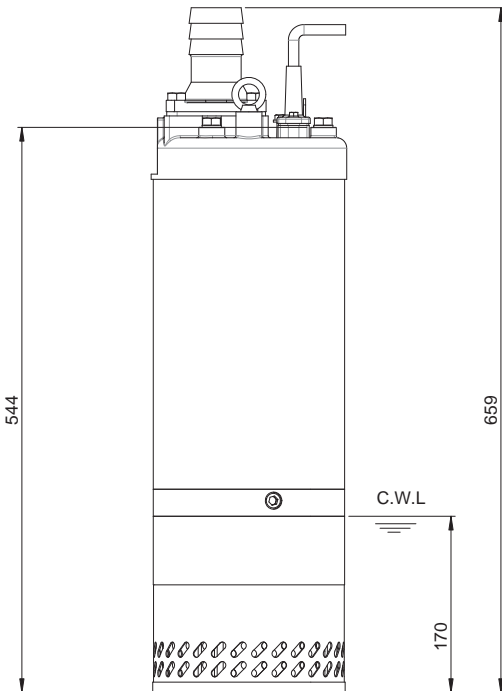

Weight : 45kg / 99lbs

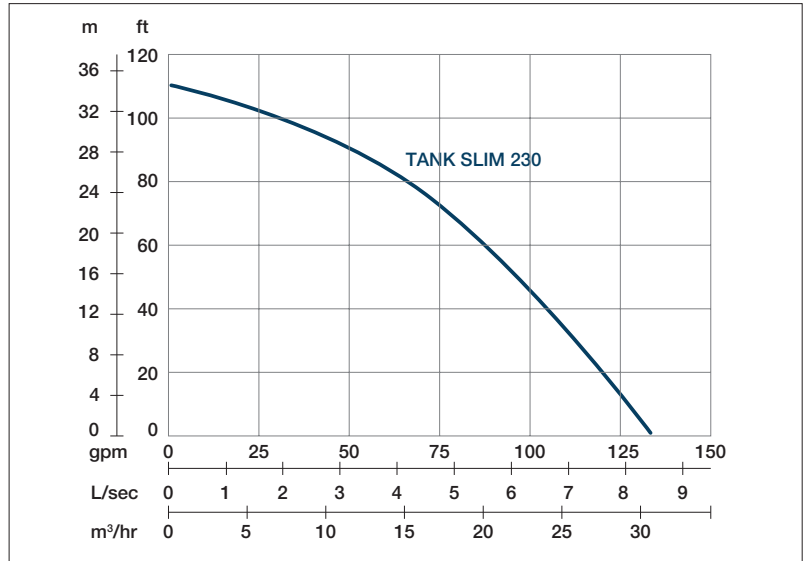

Shaft Speed : 2850 rpm Solid Passage : 7 mm Outlet : 50mm, 2in

OUTPUT	HEAD	FLOW
3 kW	Rated : 30m, 98ft	Rated : 3.3 l/s, 53 gpm
4 HP	Max : 35m, 115ft	Max : 8.3 l/s, 132 gpm

Pump Type	Electric Submersible Pumps	
	Three Phase	
	IP 68	
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter Method	D.O.L.
Lubricant	Food Grade (ISO VG32)	
Impeller Type	Closed • Dual impellers	
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings	C3 Shielded ball bearings	
Cable	H07BQF	
	Length: 20m (66ft) or longer upon request.	
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Strainer	Stainless Steel
	Outer Cover	Stainless Steel
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	20m (66ft)	
pH Range	pH 5 - pH 8	