



High efficiency and energy saving

Significant energy savings thanks to the “IE3 Premium Efficiency class” motors, reaching the “IE4” class in the Storm 75 kW models. Original Shamal design.



Air-ends of our design and production, ensuring high air yield and low energy consumption.

Air and oil circuits components optimization.

Latest generation inverters.



Silent operation

The low speed air-ends and radial fans allow Ghibli and Storm products to maintain the lowest noise values in their category, thus, ensuring the possibility for the installation close to the point-of-use.



Simplified maintenance

All machine parts subject to periodic maintenance are placed in a visible and easily accessible position. Maintenance costs are reduced thanks to the use of selected, top quality materials.



Compact design

The compact design is created to achieve the best performance and excellent reliability with the minimum footprint.

Thousands of installations around the world, make Ghibli and Storm long-lasting machines.



Remote monitoring and preventive maintenance


Our optional SMS system allows the remote control of the compressor and promptly informs the user or assistance center of the machine’s condition, reporting any failures or need to perform maintenance.



Refrigerated dryer (optional)

The models from 2.2 to 37 kW can be equipped with a refrigerated dryer powered and controlled separately by its own electronic controller.



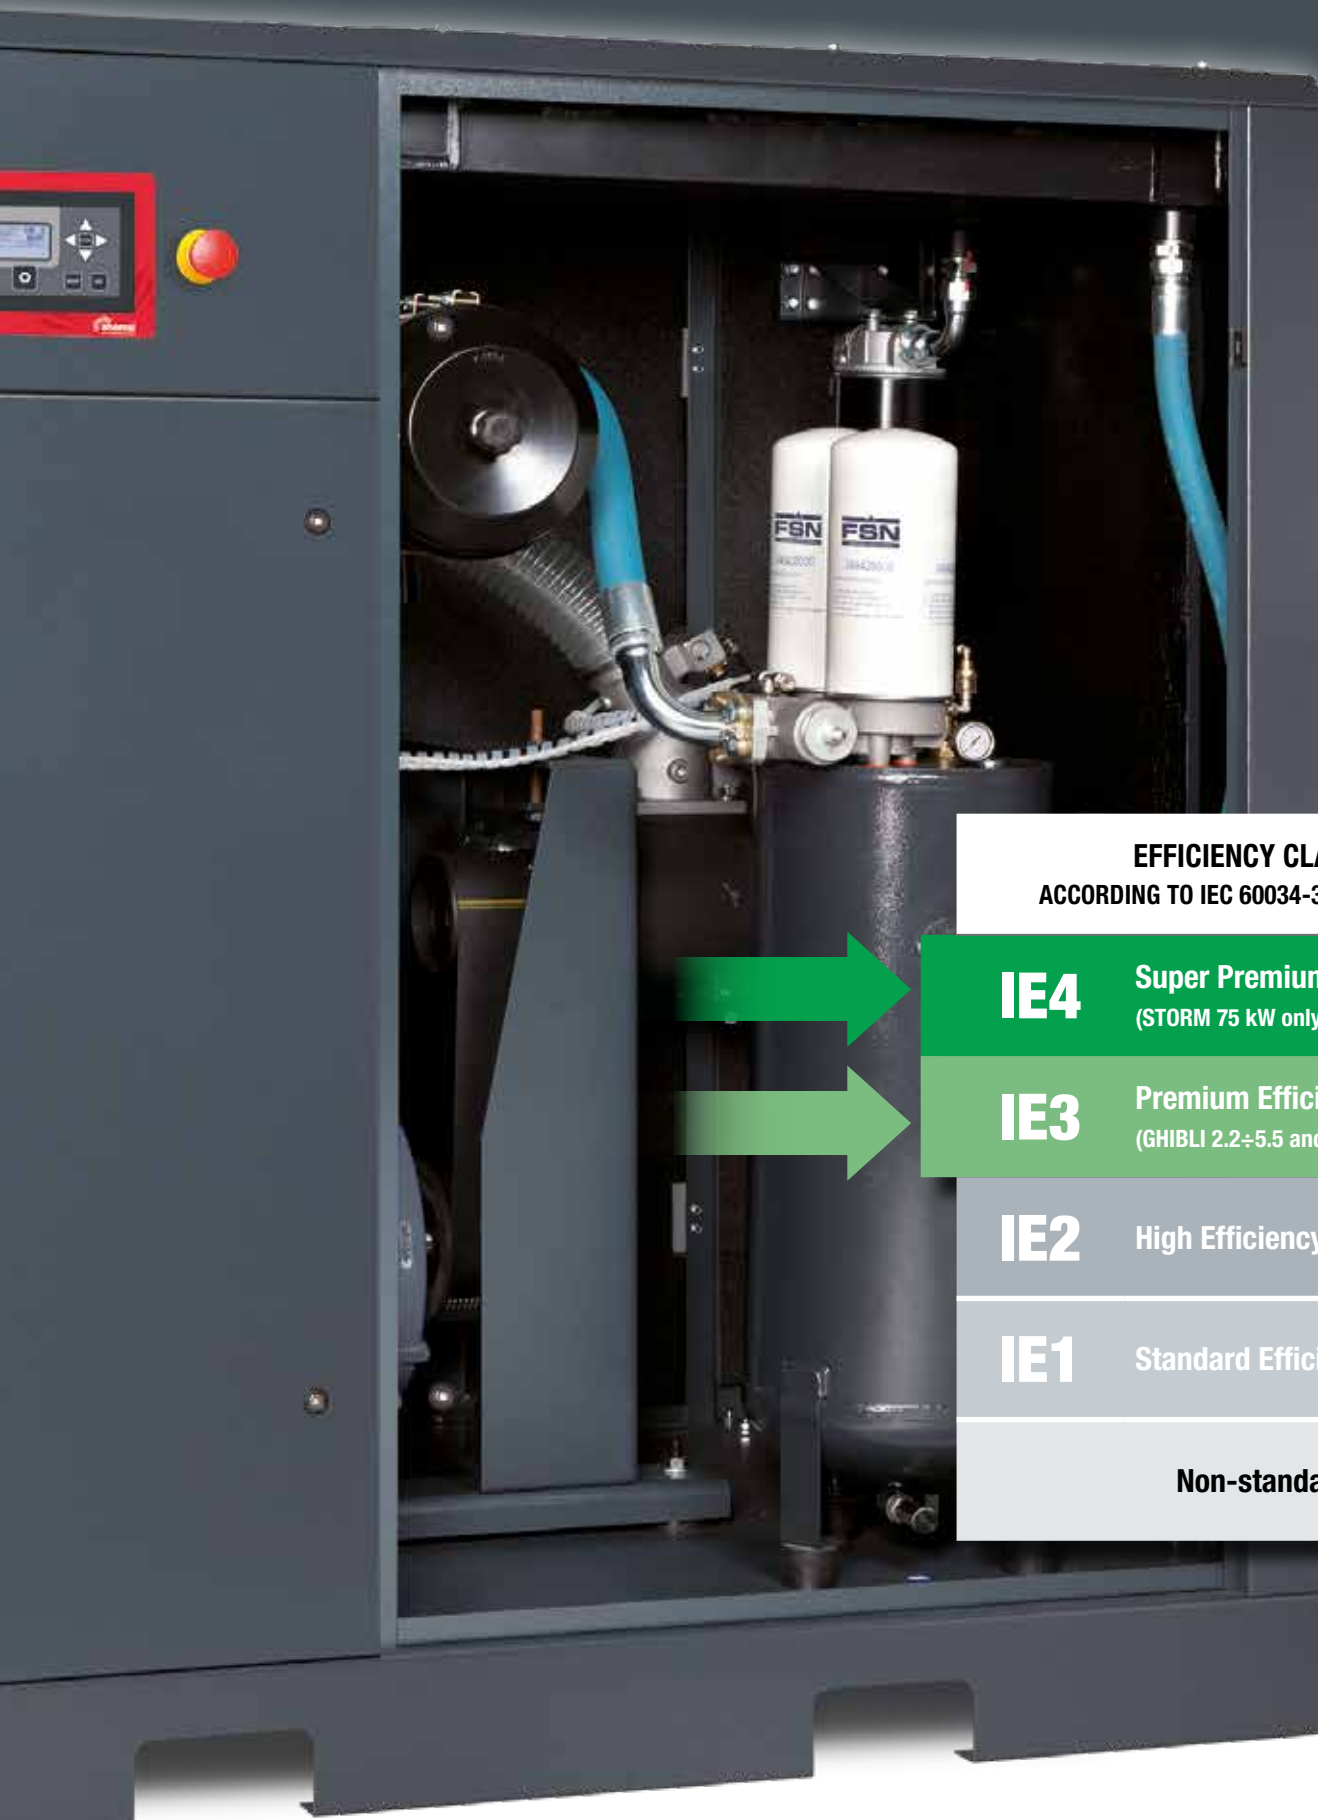

**EFFICIENCY CLASSES
ACCORDING TO IEC 60034-30-1 STANDARDS**

IE4 Super Premium Efficiency
(STORM 75 kW only)

IE3 Premium Efficiency
(GHIBLI 2.2÷5.5 and STORM 7.5÷55 kW)

IE2 High Efficiency

IE1 Standard Efficiency

Non-standard



QUALITY IS OUR PRIORITY

“In-house production” air-ends and intake regulators

What makes our Ghibli and Storm screw compressors unique is the guarantee of a product developed entirely in Italy: from the design to the packaging, each stage of production is closely followed by our engineers and aimed at developing a machine which fulfills the best requirements in terms of efficiency, quality, energy savings, performance, silent operation.

Each component is thoroughly selected from the best manufacturers in the world to perfectly integrate with our air-ends and intake regulators.

Each compressor, prior to its shipment to the clients, goes through functional tests, final testing and pre-shipment auditing, which certifies the compliance to our main 50 standards/requirements.

Moreover, our Quality System is UNI EN ISO 9001:2015 since 1996.



★ We have been producing air-ends for over 30 years

Shamal air-ends feature rotors with an optimised profile and outstanding performance. The production process is completely integrated thanks to avant-garde machine tools and sophisticated control instrumentation that guarantees the highest level of quality. A solid CAD modelling system optimises the set-up of the components. Each single rotor is cut in four well-defined manufacturing stages to achieve extremely high execution precision and repeatability. This level of construction accuracy means that each male rotor can be fitted with any female rotor. All of the air-ends are tested twice: individually after assembly later upon installation and on the complete machine.

★ Italian excellence

Shamal is a top Italian brand that combines craftsmanship with the most modern industrial technologies and highly specialised labour. The IN-HOUSE MANUFACTURED trademark is the expression of typical Italian quality and creativity, recognised and appreciated around the world, and which has always been the distinguishing element of our industrial production.

★ Intake regulators and separator blocks

In addition to the complete product and the air-ends, Shamal also produces in-house a vast range of intake regulators, thermostatic valves, separator blocks and accessories for the assembly of rotary screw compressors.

IN-HOUSE
MANUFACTURED



FS270



FS140



IR30DC

	Power range [kW]	Max. operating pressure [bar]
FS14	2.2 - 5.5	15
FS26	5.5 - 15	15
FS50	15 - 22	15
FS100	22 - 37	15
FS140	38 - 55	13
FS270	56 - 75	13

	Power range [kW]	Max. operating pressure [bar]
IR8	2.2 - 4	15
IR10DC	4 - 7.5	15
IR30DC	11 - 22	15
IR60	31 - 37	15
IR70	38 - 45 - 55	13
IR100	55 - 75	13

**STORM VS ROTARY SCREW COMPRESSORS:
DESIGNED FOR INDUSTRIAL USE
TO ACHIEVE THE HIGHEST ENERGY SAVINGS.**

Our rotary screw compressors are designed for continuous operation also in severe conditions of use, with special attention to energy consumption, low operation and maintenance costs and user-friendly installation and use.


VARIABLE SPEED WITH INVERTER

Energy consumption reduction and environment protection are among the biggest global challenges today. STORM compressors, in the 11, 22, 37, 55 and 75 kW power range, are also available in the variable speed (VS) version which ensures high performances and energy efficient solutions.


The frequency converter dynamically regulates frequency, voltage and current values supplied to the motor, constantly eliminating useless power drops and consequently adjusting the compressed air generation actually required.

The benefits of using the STORM VS with inverter are remarkable:

- continuous control of the compressed air generated by varying the speed of the electric motor from 40% up to 100% of the full speed;
- the compressed air generated is therefore constantly proportional to the requirements of the system;
- pressure control inside the system, in a range between 6 and 10 bar, depending on the chosen compressor model.

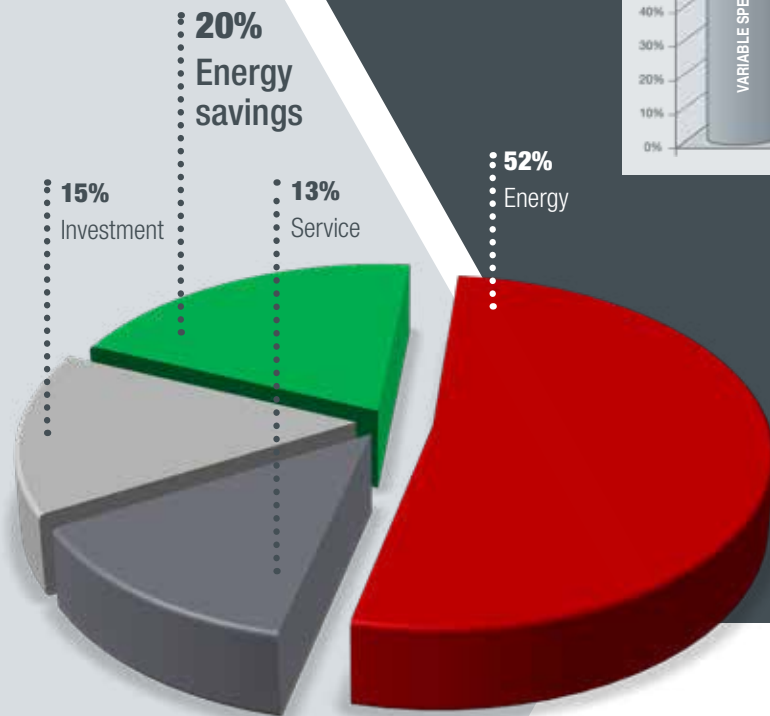

The graph shows the remarkable energy savings achieved with a variable speed compressor in a typical installation.

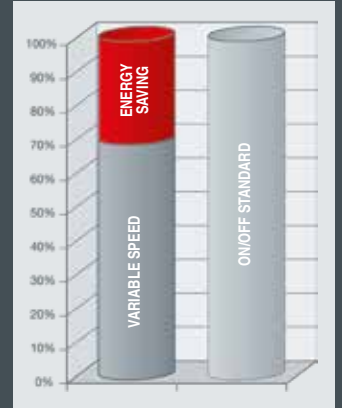


**EasyX4
Optimised control in the
compressor room**

Many compressed air stations include several compressors: EasyX4 is the easiest solution to manage complex compressor systems, with fixed speed, programmable on a weekly basis, capable of configuring up to 4 units, based on the amount of air actually required.

Three programming levels:

- **MANUAL:** compressors set on a given operating pressure range;
- **AUTOMATIC:** with pressure range exchange after a programmable time period;
- **GROUP PROGRAMMING:** the compressors can be switched within groups.

#405531604 EASY X4 CONTROLLER

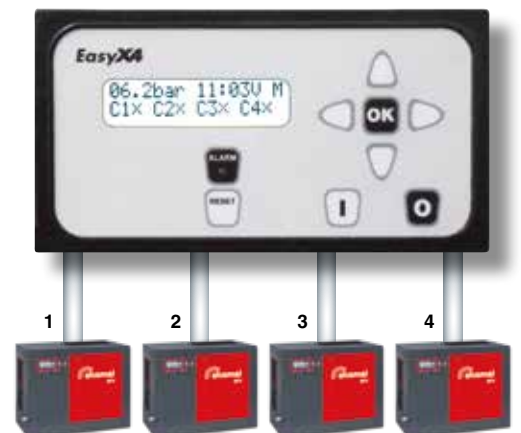

ETMII electronic controller

The display shows: operating pressure, load/total working hours, idle/load status, oil temperature.

The **Poly-V belt** drive ensures a long useful life and minimal maintenance interventions.

Ventilation is independent of the electric motor.

Fast and convenient ordinary maintenance thanks to the easy accessibility of internal components.

Dryer module

Dryer module available on the tank-mounted models (ES).

Ball tap

easier condensation drainage

Easy to transport

The lifting bars placed at the base of the tank (both front and rear), facilitate its lifting and transport.



High performances FS26TF air-end

Air-end, intake regulator, separator block and minimum pressure valve of our design and manufacturing, Made in Italy.



* Low R.P.M.

* Extremely silent and compact

* Plug&Play

* User-friendly

* Low energy consumption

* High efficiency

Model	Code	Air receiver		Power		Air outflow rate			Max. pressure		Air-end	Sound level dB(A)	Air outlet G	Net weight kg	Net dimensions LxWxH (mm)	Gross weight kg	Gross dimensions LxWxH (mm)
		ℓ	HP	KW	HP	l./min.	m ³ /min.	c.f.m.	bar	p.s.i.							
7.5 kW																	
STORM 8-08	V60NG92SHA772	-	7.5	10	1250	1.25	44	8	116	FS26	68	3/4"	205	820x680x980	219	940x770x1150	
STORM 8-10	V60NH92SHA772	-	7.5	10	1000	1.00	35	10	145	FS26	68	3/4"	205	820x680x980	219	940x770x1150	
STORM 8-13	V60NI92SHA772	-	7.5	10	750	0.75	26	13	189	FS26	68	3/4"	205	820x680x980	219	940x770x1150	
STORM 8-15	V60NI92SHA972	-	7.5	10	670	0.67	24	15	218	FS26	68	3/4"	205	820x680x980	219	940x770x1150	
STORM 8-08-270	V91NG92SHA772	270	7.5	10	1250	1.25	44	8	116	FS26	68	3/4"	288	1560x680x1510	318	1720x750x1760	
STORM 8-10-270	V91NH92SHA772	270	7.5	10	1000	1.00	35	10	145	FS26	68	3/4"	288	1560x680x1510	318	1720x750x1760	
STORM 8-13-270	V91NI92SHA772	270	7.5	10	750	0.75	26	13	189	FS26	68	3/4"	288	1560x680x1510	367	1720x750x1760	
STORM 8-15-270	V91NI92SHA572	270	7.5	10	670	0.67	24	15	218	FS26	68	3/4"	288	1560x680x1510	367	1720x750x1760	
STORM 8-08-270 ES	V91NG92SHA872	270	7.5	10	1250	1.25	44	8	116	FS26	68	1"	315	1560x680x1510	345	1720x750x1760	
STORM 8-10-270 ES	V91NH92SHA872	270	7.5	10	1000	1.00	35	10	145	FS26	68	1"	315	1560x680x1510	345	1720x750x1760	
STORM 8-13-270 ES	V91NI92SHA872	270	7.5	10	750	0.75	26	13	189	FS26	68	1"	315	1560x680x1510	394	1720x750x1760	
STORM 8-15-270 ES	V91NI92SHA672	270	7.5	10	670	0.67	24	15	218	FS26	68	1"	315	1560x680x1510	394	1720x750x1760	
STORM 8-08-500	V83NG92SHA772	500	7.5	10	1250	1.25	44	8	116	FS26	68	3/4"	334	2000x680x1630	374	2070x800x1850	
STORM 8-10-500	V83NH92SHA772	500	7.5	10	1000	1.00	35	10	145	FS26	68	3/4"	334	2000x680x1630	374	2070x800x1850	
STORM 8-13-500	V83NI92SHA772	500	7.5	10	750	0.75	26	13	189	FS26	68	3/4"	334	2000x680x1630	374	2070x800x1850	
STORM 8-08-500 ES	V83NG92SHA872	500	7.5	10	1250	1.25	44	8	116	FS26	68	1"	361	2000x680x1630	401	2070x800x1850	
STORM 8-10-500 ES	V83NH92SHA872	500	7.5	10	1000	1.00	35	10	145	FS26	68	1"	361	2000x680x1630	401	2070x800x1850	
STORM 8-13-500 ES	V83NI92SHA872	500	7.5	10	750	0.75	26	13	189	FS26	68	1"	361	2000x680x1630	401	2070x800x1850	
11 kW																	
STORM 11-08	V60NL92SHA772	-	11	15	1650	1.65	58	8	116	FS26	69	3/4"	216	820x680x980	230	940x770x1150	
STORM 11-10	V60NM92SHA772	-	11	15	1500	1.50	53	10	145	FS26	69	3/4"	216	820x680x980	230	940x770x1150	
STORM 11-13	V60NN92SHA772	-	11	15	1100	1.10	39	13	189	FS26	69	3/4"	216	820x680x980	230	940x770x1150	
STORM 11-15	V60NN92SHA972	-	11	15	980	0.98	35	15	218	FS26	69	3/4"	216	820x680x980	230	940x770x1150	
STORM 11-08-270	V91NL92SHA772	270	11	15	1650	1.65	58	8	116	FS26	69	3/4"	302	1560x680x1510	332	1720x750x1760	
STORM 11-10-270	V91NM92SHA772	270	11	15	1500	1.50	53	10	145	FS26	69	3/4"	302	1560x680x1510	332	1720x750x1760	
STORM 11-13-270	V91NN92SHA772	270	11	15	1100	1.10	39	13	189	FS26	69	3/4"	302	1560x680x1510	381	1720x750x1760	
STORM 11-15-270	V91NN92SHA572	270	11	15	980	0.98	35	15	218	FS26	69	3/4"	302	1560x680x1510	381	1720x750x1760	
STORM 11-08-270 ES	V91NL92SHA872	270	11	15	1650	1.65	58	8	116	FS26	69	1"	329	1560x680x1510	359	1720x750x1760	
STORM 11-10-270 ES	V91NM92SHA872	270	11	15	1500	1.50	53	10	145	FS26	69	1"	329	1560x680x1510	359	1720x750x1760	
STORM 11-13-270 ES	V91NN92SHA872	270	11	15	1100	1.10	39	13	189	FS26	69	1"	329	1560x680x1510	359	1720x750x1760	
STORM 11-15-270 ES	V91NN92SHA672	270	11	15	980	0.98	35	15	218	FS26	69	1"	329	1560x680x1510	359	1720x750x1760	
STORM 11-08-500	V83NL92SHA772	500	11	15	1650	1.65	58	8	116	FS26	69	3/4"	353	2000x680x1630	393	2070x800x1850	
STORM 11-10-500	V83NM92SHA772	500	11	15	1500	1.50	53	10	145	FS26	69	3/4"	353	2000x680x1630	393	2070x800x1850	
STORM 11-13-500	V83NN92SHA772	500	11	15	1100	1.10	39	13	189	FS26	69	3/4"	353	2000x680x1630	393	2070x800x1850	
STORM 11-08-500 ES	V83NL92SHA872	500	11	15	1650	1.65	58	8	116	FS26	69	1"	380	2000x680x1630	420	2070x800x1850	
STORM 11-10-500 ES	V83NM92SHA872	500	11	15	1500	1.50	53	10	145	FS26	69	1"	380	2000x680x1630	420	2070x800x1850	
STORM 11-13-500 ES	V83NN92SHA872	500	11	15	1100	1.10	39	13	189	FS26	69	1"	380	2000x680x1630	420	2070x800x1850	
15 kW																	
STORM 15-08	V60NP92SHA772	-	15	20	2150	2.15	76	8	116	FS26	70	3/4"	220	820x680x980	234	940x770x1150	
STORM 15-10	V60NQ92SHA772	-	15	20	1850	1.85	65	10	145	FS26	70	3/4"	220	820x680x980	234	940x770x1150	
STORM 15-13	V60NR92SHA772	-	15	20	1500	1.50	53	13	189	FS26	70	3/4"	220	820x680x980	234	940x770x1150	
STORM 15-15	V60NR92SHA972	-	15	20	1300	1.30	46	15	218	FS26	70	3/4"	220	820x680x980	234	940x770x1150	
STORM 15-08-500	V83NP92SHA772	500	15	20	2150	2.15	76	8	116	FS26	70	3/4"	383	2000x680x1630	423	2070x800x1850	
STORM 15-10-500	V83NQ92SHA772	500	15	20	1850	1.85	65	10	145	FS26	70	3/4"	383	2000x680x1630	423	2070x800x1850	
STORM 15-13-500	V83NR92SHA772	500	15	20	1500	1.50	53	13	189	FS26	70	3/4"	383	2000x680x1630	423	2070x800x1850	
STORM 15-15-500	V83NR92SHA572	500	15	20	1300	1.30	46	15	218	FS26	70	3/4"	383	2000x680x1630	455	2070x800x1850	
STORM 15-08-500 ES	V83NP92SHA872	500	15	20	2150	2.15	76	8	116	FS26	70	1"	412	2000x680x1630	452	2070x800x1850	
STORM 15-10-500 ES	V83NQ92SHA872	500	15	20	1850	1.85	65	10	145	FS26	70	1"	412	2000x680x1630	452	2070x800x1850	
STORM 15-13-500 ES	V83NR92SHA872	500	15	20	1500	1.50	53	13	189	FS26	70	1"	412	2000x680x1630	452	2070x800x1850	
STORM 15-15-500 ES	V83NR92SHA672	500	15	20	1300	1.30	46	15	218	FS26	70	1"	412	2000x680x1630	452	2070x800x1850	

Air flow was measured in the following operative pressures: 8 bar for "08" models - 10 bar for "10" models - 13 bar for "13" models - 15 bar for "15" models.
The data and results were measured in accordance with standard ISO 1217.
The sound level was measured in accordance with standard ISO 2151, with a tolerance of ±3 dB(A).