



High efficiency and energy saving

Significant energy savings thanks to the “IE3 Premium Efficiency class” motors, reaching the “IE4” class in the Storm 75 kW models. Original Shamal design.



Air-ends of our design and production, ensuring high air yield and low energy consumption.

Air and oil circuits components optimization.

Latest generation inverters.



Silent operation

The low speed air-ends and radial fans allow Ghibli and Storm products to maintain the lowest noise values in their category, thus, ensuring the possibility for the installation close to the point-of-use.



Simplified maintenance

All machine parts subject to periodic maintenance are placed in a visible and easily accessible position. Maintenance costs are reduced thanks to the use of selected, top quality materials.



Compact design

The compact design is created to achieve the best performance and excellent reliability with the minimum footprint.

Thousands of installations around the world, make Ghibli and Storm long-lasting machines.



Remote monitoring and preventive maintenance

Our optional SMS system allows the remote control of the compressor and promptly informs the user or assistance center of the machine’s condition, reporting any failures or need to perform maintenance.



Refrigerated dryer (optional)

The models from 2.2 to 37 kW can be equipped with a refrigerated dryer powered and controlled separately by its own electronic controller.





**EFFICIENCY CLASSES
ACCORDING TO IEC 60034-30-1 STANDARDS**



IE4 Super Premium Efficiency
(STORM 75 kW only)

IE3 Premium Efficiency
(GHIBLI 2.2÷5.5 and STORM 7.5÷55 kW)

IE2 High Efficiency

IE1 Standard Efficiency

Non-standard



QUALITY IS OUR PRIORITY

“In-house production” air-ends and intake regulators

What makes our Ghibli and Storm screw compressors unique is the guarantee of a product developed entirely in Italy: from the design to the packaging, each stage of production is closely followed by our engineers and aimed at developing a machine which fulfills the best requirements in terms of efficiency, quality, energy savings, performance, silent operation.

Each component is thoroughly selected from the best manufacturers in the world to perfectly integrate with our air-ends and intake regulators.

Each compressor, prior to its shipment to the clients, goes through functional tests, final testing and pre-shipment auditing, which certifies the compliance to our main 50 standards/requirements.

Moreover, our Quality System is UNI EN ISO 9001:2015 since 1996.



★ We have been producing air-ends for over 30 years

Shamal air-ends feature rotors with an optimised profile and outstanding performance. The production process is completely integrated thanks to avant-garde machine tools and sophisticated control instrumentation that guarantees the highest level of quality. A solid CAD modelling system optimises the set-up of the components. Each single rotor is cut in four well-defined manufacturing stages to achieve extremely high execution precision and repeatability. This level of construction accuracy means that each male rotor can be fitted with any female rotor. All of the air-ends are tested twice: individually after assembly later upon installation and on the complete machine.

★ Italian excellence

Shamal is a top Italian brand that combines craftsmanship with the most modern industrial technologies and highly specialised labour. The IN-HOUSE MANUFACTURED trademark is the expression of typical Italian quality and creativity, recognised and appreciated around the world, and which has always been the distinguishing element of our industrial production.

★ Intake regulators and separator blocks

In addition to the complete product and the air-ends, Shamal also produces in-house a vast range of intake regulators, thermostatic valves, separator blocks and accessories for the assembly of rotary screw compressors.



FS270



FS140



IR30DC

	Power range [kW]	Max. operating pressure [bar]
FS14	2.2 - 5.5	15
FS26	5.5 - 15	15
FS50	15 - 22	15
FS100	22 - 37	15
FS140	38 - 55	13
FS270	56 - 75	13

	Power range [kW]	Max. operating pressure [bar]
IR8	2.2 - 4	15
IR10DC	4 - 7.5	15
IR30DC	11 - 22	15
IR60	31 - 37	15
IR70	38 - 45 - 55	13
IR100	55 - 75	13

**STORM VS ROTARY SCREW COMPRESSORS:
DESIGNED FOR INDUSTRIAL USE
TO ACHIEVE THE HIGHEST ENERGY SAVINGS.**

Our rotary screw compressors are designed for continuous operation also in severe conditions of use, with special attention to energy consumption, low operation and maintenance costs and user-friendly installation and use.


VARIABLE SPEED WITH INVERTER

Energy consumption reduction and environment protection are among the biggest global challenges today. STORM compressors, in the 11, 22, 37, 55 and 75 kW power range, are also available in the variable speed (VS) version which ensures high performances and energy efficient solutions.


The frequency converter dynamically regulates frequency, voltage and current values supplied to the motor, constantly eliminating useless power drops and consequently adjusting the compressed air generation actually required.

The benefits of using the STORM VS with inverter are remarkable:

- continuous control of the compressed air generated by varying the speed of the electric motor from 40% up to 100% of the full speed;
- the compressed air generated is therefore constantly proportional to the requirements of the system;
- pressure control inside the system, in a range between 6 and 10 bar, depending on the chosen compressor model.

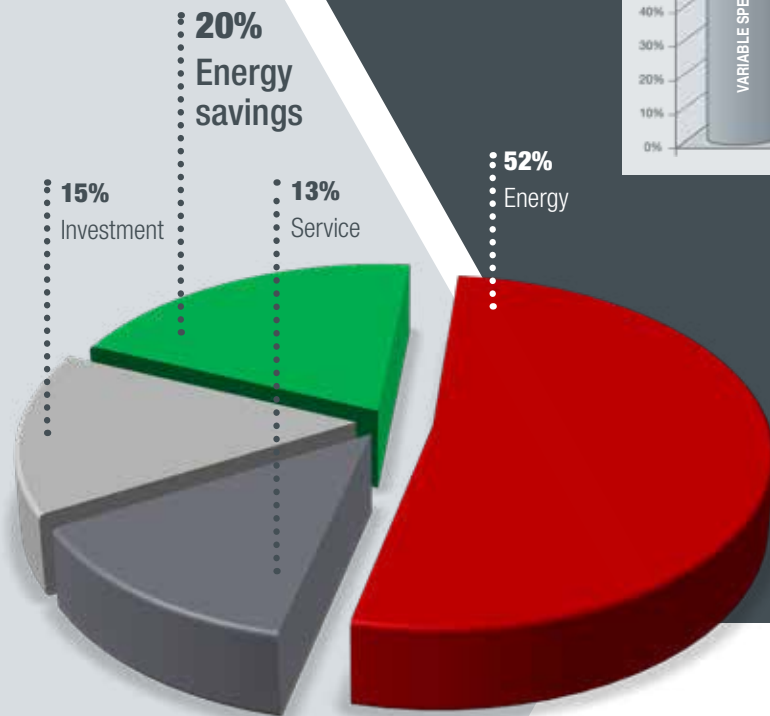

The graph shows the remarkable energy savings achieved with a variable speed compressor in a typical installation.

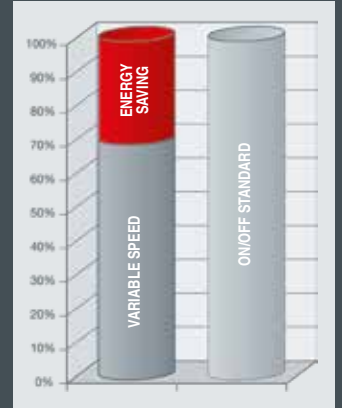


**EasyX4
Optimised control in the
compressor room**

Many compressed air stations include several compressors: EasyX4 is the easiest solution to manage complex compressor systems, with fixed speed, programmable on a weekly basis, capable of configuring up to 4 units, based on the amount of air actually required.

Three programming levels:

- **MANUAL:** compressors set on a given operating pressure range;
- **AUTOMATIC:** with pressure range exchange after a programmable time period;
- **GROUP PROGRAMMING:** the compressors can be switched within groups.

#405531604 EASY X4 CONTROLLER

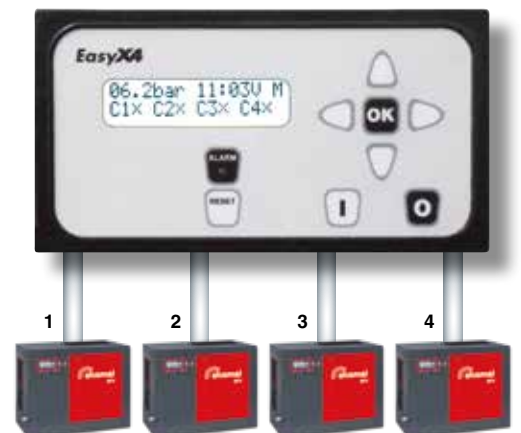

GHIBLI SE 2.2-3.0-4.0

2.2-3-4 kW

Compressor control
Pressure switch with pressure gauge and counter

Dryer module
Dryer module in tank-mounted "ES" versions

Ball tap
easier condensation drainage

FS14 air-end 
Entirely designed, manufactured and tested in our Italian plant: the special design of the rotor profile ensures high performances.



★ Ease of use

User-friendly ON / OFF electromechanical control.

★ Easy maintenance

Fast and simple ordinary maintenance thanks to the easy accessibility of internal components.

★ Extremely silent

The centrifugal fan, activated through thermostatic control, ensures proper cooling, maintaining the noise level of the machine low.

★ Phases sequence relay

Checks the correct direction of rotation of the screw unit at the first start-up.



ELECTROMECHANICAL

Model	Code	Air receiver ℓ	Power		Air outflow rate			Max. pressure		Air-end	Sound level dB(A)	Air outlet G	Net weight kg	Net dimensions LxWxH (mm)	Gross weight kg	Gross dimensions LxWxH (mm)
			kW	HP	L/min.	m ³ /min.	c.f.m.	bar	p.s.i.							
2.2 kW																
GHIBLI SE 2.2-08	V51JU72SHA572	-	2.2	3	325	0.33	11	8	116	FS14	58	1/2"	93	580x480x760	104	720x670x970
GHIBLI SE 2.2-10	V51JT72SHA572	-	2.2	3	290	0.29	10	10	145	FS14	58	1/2"	93	580x480x760	109	720x670x970
GHIBLI SE 2.2-08 M	V51JU60SHA572	-	2.2	3	300	0.30	11	8	116	FS14	58	1/2"	98	580x480x760	109	720x670x970
GHIBLI SE 2.2-10 M	V51JT60SHA572	-	2.2	3	240	0.24	8	10	145	FS14	58	1/2"	98	580x480x760	109	720x670x970
GHIBLI SE 2.2-08-200	V77JU72SHA572	200	2.2	3	325	0.33	11	8	116	FS14	58	1/2"	142	1480x520x1280	175	1560x660x1430
GHIBLI SE 2.2-10-200	V77JT72SHA572	200	2.2	3	290	0.29	10	10	145	FS14	58	1/2"	142	1480x520x1280	175	1560x660x1430
GHIBLI SE 2.2-10-200 M	V77JT60SHA572	200	2.2	3	240	0.24	8	10	145	FS14	58	1/2"	148	1480x520x1280	181	1560x660x1430
GHIBLI SE 2.2-08-200 ES	V77JU72SHA672	200	2.2	3	325	0.33	11	8	116	FS14	58	1/2"	164	1480x520x1280	197	1560x660x1430
GHIBLI SE 2.2-10-200 ES	V77JT72SHA672	200	2.2	3	290	0.29	10	10	145	FS14	58	1/2"	164	1480x520x1280	197	1560x660x1430
GHIBLI SE 2.2-10-200 ES M	V77JT60SHA672	200	2.2	3	240	0.24	8	10	145	FS14	58	1/2"	144	1480x520x1280	190	1560x660x1430
3 kW																
GHIBLI SE 3.0-08	V51JS72SHA572	-	3	4	430	0.43	15	8	116	FS14	59	1/2"	99	580x480x760	110	720x670x970
GHIBLI SE 3.0-10	V51JQ72SHA572	-	3	4	385	0.39	14	10	145	FS14	59	1/2"	99	580x480x760	110	720x670x970
GHIBLI SE 3.0-08-200	V77JS72SHA572	200	3	4	430	0.43	15	8	116	FS14	59	1/2"	155	1480x520x1280	188	1560x660x1430
GHIBLI SE 3.0-10-200	V77JQ72SHA572	200	3	4	385	0.39	14	10	145	FS14	59	1/2"	155	1480x520x1280	188	1560x660x1430
GHIBLI SE 3.0-08-200 ES	V77JS72SHA672	200	3	4	430	0.43	15	8	116	FS14	59	1/2"	177	1480x520x1280	210	1560x660x1430
GHIBLI SE 3.0-10-200 ES	V77JQ72SHA672	200	3	4	385	0.39	14	10	145	FS14	59	1/2"	177	1480x520x1280	210	1560x660x1430
4 kW																
GHIBLI SE 4.0-08	V51JR72SHA572	-	4	5.5	580	0.58	20	8	116	FS14	60	1/2"	108	580x480x760	119	720x670x970
GHIBLI SE 4.0-10	V51JP72SHA572	-	4	5.5	485	0.49	17	10	145	FS14	60	1/2"	108	580x480x760	109	720x670x970
GHIBLI SE 4.0-08 -200	V77JR72SHA572	200	4	5.5	580	0.58	20	8	116	FS14	60	1/2"	157	1480x520x1280	190	1560x660x1430
GHIBLI SE 4.0-10-200	V77JP72SHA572	200	4	5.5	485	0.49	17	10	145	FS14	60	1/2"	157	1480x520x1280	190	1560x660x1430
GHIBLI SE 4.0-08-200 ES	V77JR72SHA672	200	4	5.5	580	0.58	20	8	116	FS14	60	1/2"	179	1480x520x1280	212	1560x660x1430
GHIBLI SE 4.0-10-200 ES	V77JP72SHA672	200	4	5.5	485	0.49	17	10	145	FS14	60	1/2"	179	1480x520x1280	212	1560x660x1430

Air flow was measured in the following operative pressures: 8 bar for "08" models - 10 bar for "10" models.
The data and results were measured in accordance with standard ISO 1217.
The sound level was measured in accordance with standard ISO 2151, with a tolerance of ±3 dB(A).